

## OmniHub 6 - компактная экономичная головная станция

Sencore OmniHub 6 - многофункциональная компактная масштабируемая IP-TV / CATV головная станция для телевизионных операторов различного уровня.



Sencore OmniHub 6 - это экономичная многофункциональная головная станция нового поколения, ориентированная на использование кабельными операторами, в корпоративных сетях, гостиничном бизнесе и для мониторинга вещания.

Устройство имеет шасси 1 RU для установки в стандартную стойку 19". Шасси может поставляться с резервированным блоком питания и имеет 6 слотов для установки модулей приема и обработки видео с поддержкой горячей замены. На базе Sencore OmniHub 6 можно построить головную станцию IPTV & QAM с самым широким набором возможностей для гостиничного бизнеса, образовательных и государственных учреждений, MDU и других задач.

Предлагая превосходный баланс между производительностью и стоимостью, платформа Sencore OmniHub 6 идеально подходит для многоканального кодирования, приема сигнала, цифровой обработки и одновременного вещания в IPTV / QAM сетях с минимальными затратами. Сеть сервисных центров поддержки и простота настройки позволят быстро настроить головную станцию и начать предоставлять услуги, и сократить эксплуатационные расходы.

### Возможности

- Шасси 19" 1RU
- Резервированный (двойной) БП - OmniHub 6D (опция)
- Опциональный 8-ми каналный модуль модулятора с QAM/DTMB/OFDM с разъемом на передней панели - OmniHub 6RFX
- 4 порта GbE Ethernet на передней панели
  - 2 порта управления
  - 2 порта данных
- Поддерживается до 120 входных и 120 выходных IP потоков SPTS/MPTS
- 6 слотов для сменных модулей с возможностью горячей замены
- Прием до 24 ВЧ несущих (QAM-B, DVB-S/S2/S2X, 8VSB)
- Кодирование до 24 HD каналов (через HDMI входы)
- Кодирование до 48 SD каналов (через аналоговые входы)
- Гибкость и масштабируемость
- Простота установки
- Дружественный и интуитивно понятный интерфейс управления
- Малое энергопотребление





*Головная станция Sencore OmniHub 6*



*Задняя панель модели Sencore OmniHub 6 D*



*Задняя панель модели Sencore OmniHub 6*



*Головная станция Sencore OmniHub 6RF*



*Задняя панель модели Sencore OmniHub 6RF*

## Технические характеристики



OHR6-DVBC-00

DVBC-C - Модуль приемника	
Input	4 channels via 1 RF female connector
CI	2 x PCMCIA CI slots
CAM	Descrambled channel quantity depends on CAM capability, 2 CAMs could be different
QAM Mode	Annex A/C
Frequency Range	47~862MHz
Bandwidth	6/7/8MHz
Constellation	16QAM/32QAM/64QAM/128QAM/256QAM
Symbol Rate	3.6~6.952Ms/s
Signal Level	40~80dBuV
CA System	Supports mainstream CAS
Power Consumption	Max. 9.5W

DTMB - Модуль приемника	
Input	4 channels via 1 RF female connector
CI	2 x PCMCIA CI slots
CAM	Descrambled channel quantity depends on CAM capability, 2 CAMs could be different
Modulation Mode	TDS-OFDM
Frequency Range	47~862MHz
Constellation	4QAM-NR/4QAM/16QAM/32QAM/64QAM
Signal Level	-65~-25dm
CA System	Supports mainstream CAS
Power Consumption	Max. 9.5W



OHR6-DVBC-ISDBT-01

DVBC Annex B - Модуль приемника	
Input	4 channels via 1 RF female connector
CI	2 x PCMCIA CI slots
CAM	Descrambled channel quantity depends on CAM capability, 2 CAMs could be different
QAM Mode	Annex B
Frequency Range	47~862MHz
Bandwidth	6MHz
Constellation	64QAM, 256QAM
Symbol Rate	5.057Ms/s (64QAM) 5.360Ms/s (256QAM)
Signal Level	40~80dBuV
CA System	Supports mainstream CAS
Power Consumption	Max. 9.5W

ISDB-T - Модуль приемника	
Input	4 channels via 1 RF female connector
CI	2 x PCMCIA CI slots
CAM	Descrambled channel quantity depends on CAM capability, 2 CAMs could be different
Frequency Range	177.143-863.143 MHz
Bandwidth	6/7/8MHz
Constellation	DQPSK, QPSK, 16QAM, 64QAM
FEC	1/2, 2/3, 3/4, 5/6, 7/8, Automatic
Signal Level	-80~-20dBm
CA System	Supports mainstream CAS
Power Consumption	Max. 9.5W



OHR6-DVBS2FTA-01

DVB-S/S2/S2X - Модуль приемника	
Input	C/Ku Band, 4 channels via 4 RF female connectors
LNB Power	Independent power supplies for each LNB
LNB Voltage	13V/18V
LNB Current	Max. 400mA
Constellation	DVB-S: QPSK, 8PSK DVB-S2: QPSK, 8PSK, 16APSK, 32APSK DVB-S2X: QPSK, 8PSK, 16APSK, 32APSK, 64APSK
Frequency Range	950~2150MHz
Signal Level	-70~-20dBm
Roll-off Factor	0.15, 0.20, 0.25, 0.35
Symbol Rate	DVB-S: 1~45Mpsps DVB-S2: 1~45Mpsps DVB-S2X: 1~34 Msps
FEC	DVB-S: 1/2, 2/3, 3/4, 5/6, 7/8 DVB-S2: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 DVB-S2X: 11/15, 7/9, 4/5, 5/6 (Normal FEC FECFRAME)
Power Consumption	Max. 30W




OHR6-DVBS2FTA-01A

DVB-S/S2/S2X - Модуль приемника	
Input	C/Ku Band, 8 channels via 8 RF female connectors
LNB Power	Independent power supplies for each LNB
LNB Voltage	13V/18V
LNB Current	Max. 400mA
Constellation	DVB-S: QPSK, 8PSK DVB-S2: QPSK, 8PSK, 16APSK, 32APSK DVB-S2X: QPSK, 8PSK, 16APSK, 32APSK, 64APSK *DVB-S2X and 64APSK are licensed features
Frequency Range	950~2150MHz
Signal Level	-70~-20dBm
Roll-off Factor	0.15, 0.20, 0.25, 0.35
Symbol Rate	DVB-S: 1~45Mpsps DVB-S2: 1~45Mpsps DVB-S2X: 1~34 Msps
FEC	DVB-S: 1/2, 2/3, 3/4, 5/6, 7/8 DVB-S2: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 DVB-S2X: 11/15, 7/9, 4/5, 5/6 (Normal FEC FECFRAME)
Power Consumption	Max. 30W



OHR6-DVBS2CI-01

DVB-S/S2/S2X - Модуль приемника	
Input	C/Ku Band, 4 channels via 2 RF female connectors CH1 & CH2 via LNB-1 CH3 & CH4 via LNB-2
LNB Power	Independent power supplies for each LNB
LNB Voltage	13V/18V
LNB Current	Max. 400mA
CI	2 x PCMCIA CI slots
CAM	Descrambled channel quantity depends on CAM capability, 2 CAMs could be different
Constellation	DVB-S: QPSK, 8PSK DVB-S2: QPSK, 8PSK, 16APSK, 32APSK DVB-S2X: QPSK, 8PSK, 16APSK, 32APSK, 64APSK
Frequency Range	950~2150MHz
Signal Level	-70~-20dBm
Roll-off Factor	0.15, 0.20, 0.25, 0.35
Symbol Rate	DVB-S: 1~45Mpsps DVB-S2: 1~45Mpsps DVB-S2X: 1~34 Msps
FEC	DVB-S: 1/2, 2/3, 3/4, 5/6, 7/8 DVB-S2: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 DVB-S2X: 11/15, 7/9, 4/5, 5/6 (Normal FEC FECFRAME)
CA System	Supports mainstream CAS
Power Consumption	Max. 22W

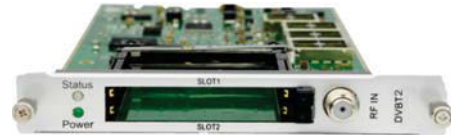

OHR6-DVBT2CI-00

DVB-T/T2 - Модуль приемника	
Input	4 channels via 1 RF female connector
CI	2 x PCMCIA CI slots
CAM	Descrambled channel quantity depends on CAM capability, 2 CAMs could be different
Frequency Range	47~862MHz
Bandwidth	6/7/8MHz
Constellation	DVB-T: QPSK/16QAM/64QAM DVB-T2: QPSK/16QAM/64QAM/256QAM
Guard Interval	DVB-T: 1/4, 1/8, 1/16, 1/32 DVB-T2: 1/4, 1/8, 1/16, 1/32, 1/128 19/256, 19/128
FFT Size	DVB-T: 2K, 8K DVB-T2: 1K, 2K, 4K, 8K, 16K, 32K
Signal Level	-80~-20dBm
CA System	Supports mainstream CAS
Power Consumption	Max. 8W



OHR6-8VSB-00

**8VSB - Модуль приемника**


Input	4 channels via 4 RF female connector
Frequency Range	50~860MHz
Bandwidth	6MHz
Modulation	8VSB
Signal Level	-80~-20dBm
Power Consumption	Max. 9.5W



OHM6-8VSB-R01/R01A

**8VSB - Модуль модулятора**

Output	4/8 frequencies via 1 RF female connector 75Ω
Standard	ATSC A/35
Frequency Range	50~860 MHz
Bandwidth	6MHz
Constellation	8VSB
Output Level	Max. 105dBμV
MER	≥40dB
Power Consumption	4CH: Max. 12W; 8CH: Max. 14W

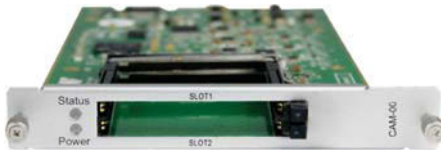

OHP6-CAM-00

**CI - Модуль CI**


Standard	EN 50221
Interface	2 x PCMCIA CI slots
CAM Scrambling	Support Xcrypt CAMCAS
CAM Descrambling	Supports mainstream CAS Descrambled channel quantity depends on CAM capability, 2 CAMs could be different
Power Consumption	Max. 8W



OHM6-OFDM-R01/R01A

**OFDM - Модуль модулятора**

Output	4/8 frequencies via 1 RF female connector 75Ω
Standard	ETSI EN 300744
Frequency Range	47~862MHz
Bandwidth	8MHz
Constellation	QPSK/16QAM/64QAM
Guard Intervals	1/4, 1/8, 1/16, 1/32
FFT Size	2K, 8K
Code Rates	1/2, 2/3, 3/4, 5/6, 7/8
Output Level	Max. 105dB V
MER	≥32dB
Power Consumption	4CH: Max. 23W; 8CH: Max. 27W

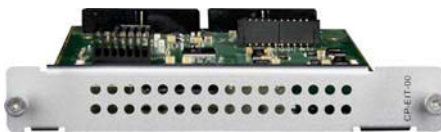

OHP6-EIT-00

**EIT - Модуль мультиплексора EIT**

Standard	DVB standard
Inputs	DVB-S/S2/S2X/T/T2/C/ISDB-T/DTMB/IP
Outputs	QAM A/C/OFDM/ISDB-T/DTMB/IP
Processing Capability	Re-multiplexing of incoming EPG data 32 TS stream input, 16 TS stream output
EIT Table Generation	PID 18 with EIT P/F and EIT Scheduled data
TDT/TOT Table	Pass through to the output TS
Power Consumption	4W



OHM6-DTMB-R01/R01A

DTMB - Модуль модулятора	
Output	4/8 frequencies via 1 RF female connector 75Ω
Standard	DTMB GB20600-2006
Frequency Range	47~862MHz
Constellation	4QAM-NR/4QAM/16QAM/32QAM/64QAM
Output Level	Max. 105dB V
MER	≥32dB
Power Consumption	4CH: Max. 23W; 8CH: Max. 27W




OHM6-QAMA-R01/R01A

QAMA - Модуль модулятора	
Output	4/8 frequencies via 1 RF female connector 75Ω
Standard	ITU-T J.83 Annex A/C
Frequency Range	47~862MHz
Bandwidth	6/7/8MHz
Constellation	16QAM/32QAM/64QAM/128QAM/256QAM
Symbol Rate	3.6~6.9 Ms/s
Output Level	Max. 105dB V
MER	≥32dB
Power Consumption	4CH: Max. 23W; 8CH: Max. 27W



OHM6-QAMB-R01/R01A

QAMB - Модуль модулятора	
Output	4/8 frequencies via 1 RF female connector 75Ω
Standard	ITU-T J.83 Annex B
Frequency Range	47~862MHz
Bandwidth	6/7/8 MHz
Constellation	64QAM/256QAM
Symbol Rate	3.6~6.9 Ms/s
Output Level	Max. 105dBμV
MER	≥32dB
Power Consumption	4CH: Max. 23W; 8CH: Max. 27W

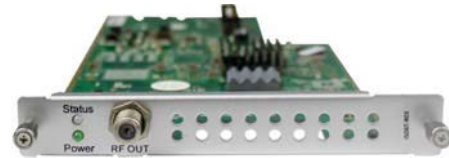

OHM6-QAMA/B-R00

QAM - Модуль модулятора	
Output	16 non-adjacent frequencies via 1 RF female connector 75Ω
1 x RJ45	Reserved for scrambling
Standard	ITU-T J.83 Annex A/B/C
Frequency Range	47~862MHz
Bandwidth	6/7/8MHz
Constellation	16QAM/32QAM/64QAM/128QAM/256QAM
Symbol Rate	3.6~6.9Ms/s
Output Level	Max. 106dBμV
MER	>40dB
Power Consumption	QAMA: Max. 22W; QAMB: Max. 28W



OHM6-ISDB-T-R01/R01A

ISDB-T - Модуль модулятора	
Output	4/8 frequencies via 1 RF female connector, 75Ω
Standard	ARIB STD-B31
Frequency Range	57-860MHz
Bandwidth	6MHz
Constellation	QPSK, 16QAM, 64QAM
Transmission Mode	2K
RS Code	RS(204.188)
FEC	1/2, 2/3, 3/4, 5/6, 7/8
Guard Interval	1/4, 1/8, 1/16, 1/32
Hierarchy Mode	Layer A
Segment Mode	Full Seg
Output Level	Max. 104dBμV
MER	≥40dB
Power Consumption	4CH: Max. 23W; 8CH: Max. 27W



OHE6-SDI-01

SDI - Модуль кодера	
Input	2 channels via 2 SDI SDI via BNC connector
Video	H.264/AVC HD: MP/HP@L4.0, SD: MP/HP@L3.0 MPEG-2 SD: MP @ML HD: MP@HL
Resolution	SD: 576i50, 480i59.94 HD: 1080p-25/30/50/59.94/60, 1080i-50/60, 720p-50/60 *The maximum output resolution is 1080i60.
Bitrate Control	CBR
Bitrate	1,000~18,000Kbps
GOP Structure	IBBP, IPPP, IBP
GOP Size	6~63
Audio	MPEG-1 Layer II, AC3, AAC
Audio Pair	2 audio pairs
Audio Mode	Stereo (2.0, including downmix)
Sampling Rate	48kHz
Power Consumption	Max. 16W



OHM6-QAMA-02/02A

IPQAM - Модуль модулятора	
IP input	2x100/1000Mbps ports, 1xSFP+/10Gbps port
IP Encapsulation	MPEG TS over UDP/RTP
MPEG TS	MPTS and SPTS
I/O Processing	Up to 512 channels either via 2xGbE input or 10GbE input
Addressing	Unicast and multicast
IGMP Version	IGMP v2, IGMP v3
QAM Output	
Output	1xRF port, max 16/32 non-adjacent channels QAM modulation
Standard	ITU-T J.83 Annex A/C
QAM Constellation	64/256 QAM, configurable for each frequency
Symbol Rate	3.6~7Mbauds
Output Level	90dBuV~115dBuV according to modulation frequency quantity
Output Range	57~858MHz
Bandwidth	6/7/8MHz
MER	≥43dB (equalized)
PCR Correction	Support
Multiplexing	
Table Supported	SI/PSI
PID Processing	Pass-through, remapping, filtering
EIT Processing	Pass-through
External Data	EPG, PID and SI insertion
Scrambling	
Interface	1x100/1000 Mbps port
Scrambling Algorithms	CSA
SCS	Internal
CAS Connections	Up to 4 different CA systems
Supported CAS	Support major CA systems
Max. TS rate	1.6Gbps
EMM Bitrate	Up to 3Mbps
Power Consumption	Max. 45W



OHE6-HDMI-02C

HDMI - Модуль кодера	
Input	2 channels via 2 HDMI or 2 component Female connectors (HDMI1.4) CC/Component input via DB15 port
Video	H.264/AVC HD: MP/HP@L4.0, SD: MP/HP@L3.0 MPEG-2 SD: MP @ML HD: MP@HL
Resolution	SD: 576i50, 480i59.94 HD: 1080p-25/30/50/59.94/60 1080i-50/60 720p-50/60 *The maximum output resolution is 1080i60.
Bitrate Control	CBR
Bitrate	1,000~18,000Kbps
GOP Structure	IBBP, IPPP, IBP
GOP Size	6~63
Audio	MPEG-1 Layer II, AC3, AAC
Audio Mode	Stereo (2.0, including downmix)
Sampling Rate	48kHz
Power Consumption	Max. 16W



OHE6-HDMI-02

HDMI - Модуль кодера	
Input	2 channels via 2 HDMI Female connectors (HDMI1.4) CC via RCA connector
Video	H.264/AVC HD: MP/HP@L4.0, SD: MP/HP@L3.0 MPEG-2 SD: MP @ML HD: MP@HL
Resolution	SD: 576i50, 480i59.94 HD: 1080p-25/30/50/59.94/60 1080i-50/60 720p-50/60 *The maximum output resolution is 1080i60.
Bitrate Control	CBR
Bitrate	1,000~18,000Kbps
GOP Structure	IBBP, IPPP, IBP
GOP Size	6~63
Audio	MPEG-1 Layer II, AC3, AAC
Audio Mode	Stereo (2.0, including downmix)
Sampling Rate	48kHz
Power Consumption	Max. 16W



OHE6-HDMI-06

HEVC - Модуль кодера	
Input	4 channels via 4 HDMI female connector (HDMI 1.4)
Video	H.264/AVC HD: MP/HP@L4.0/4.1/4.2 H.265/HEVC HD: MP(High Tier)@L4.0/4.1
Resolution	Input: 1080i-50/59.94/60, 1080P-50/59.94/60, 720P-50/59.94/60 Output: 1080P-50/59.94/60, 720P-50/59.94/60
Bitrate Control	CBR
Video Bitrate	600Kbps-12Mbps
GOP Structure	IPPP, IBBP
Aspect Ratio	Automatic or manual (4:3, 16:9)
Audio	MPEG-1 Layer II, AC3 (optional), AAC (optional)
Audio Bitrate	32~384 Kbps
Audio Mode	Stereo
Audio Sampling Rate	48KHz
Audio Volume Leveling	-20dB~20dB
OSD Overlay	2*Logo/QR code overlay (40*40 to 256*256) Or 1*static OSD overlay
Power Consumption	Max.20W

Notes: OHE-HDMI-06 will forcefully output 4 HD programs with same video resolution which follows the largest video resolution among the input source and SD encoding is not supported yet.





OHE6-HDMI-05A

HEVC - Модуль кодера	
Input	8 channels via 8 HDMI female connectors (HDMI 1.4)
Video	H.264/AVC MP/HP@4.2 H.265/HEVC MP@L4.1
Resolution	HD: 1080p-29.97/30 1080i-29.97/30/50/59.94/60 720p-50/59.94/60 SD: 576i50 576p50 480i-59.94/60 480p-59.94/60 *Output supports progressive only, and resolution supports up to 1080p30.
Bitrate Control	CBR
Video Bitrate	600~20000 Kbps
GOP Structure	IPPP
GOP Size	1~60
Aspect Ratio	Automatic or Manual
Audio	MPEG-1 Layer II, AC3 (optional), AAC (optional)
Audio Bitrate	32~192 Kbps
Audio Mode	Stereo 2.0
Audio Sampling Rate	48kHz
Audio Volume Leveling	-20dB~20dB
OSD Overlay	Text, Image, QR Code
Power Consumption	Max. 20W



OHE6-CVBS-03

CVBS - Модуль кодера	
Interface	Input 2 channels via 2 CVBS CVBS via BNC connector
Video	H.264/AVC SD: MP/HP@L3.0 MPEG-2 SD: MP @ML
Bitrate Control	CBR
Bitrate	1,000~6,000Kbps
GOP Structure	IBBP, IPPP, IBP
Audio	MPEG-1 Layer II
GOP Size	6~63
Resolution	SD: 576i50, 480i59.94
Audio Mode	Stereo (2.0, including downmix)
Sampling Rate	48kHz
Power Consumption	Max. 16W
Closed Caption Input	Support



OHE6-CVBS-00

CVBS - Модуль кодера	
Input	6 channels via 2 DB15 connector each DB15 for 3 channels 2 x RCA-DB15 adaptor cables come along with module
Video	H.264/AVC SD: MP/HP@L3.0 MPEG-2 SD: MP@ML
Resolution	SD: 576i50, 480i59.94
Bitrate Control	CBR
Bitrate	1,000~6,000Kbps
GOP Structure	IBBP, IPPP, IBP
GOP Size	6~63
Aspect Ratio	Automatic or Manual
Audio	MPEG-1 Layer II
Audio Bitrate	32~384Kbps
Audio Mode	Stereo (2.0, including downmix)
Audio Sampling Rate	48kHz
Audio Volume Leveling	-20dB~20dB
Power Consumption	Max. 17W



OHE6-CVBS-R01

CVBS - Модуль кодера	
Input	8 channels via 2 DB15 connectors each DB15 for 4 channels 2 x RCA-DB15 adaptor cables come along with module
Video	H.264/AVC SD: MP/HP@L3.0/3.1/3.2
Resolution	SD: 576i50, 480i59.94
Bitrate Control	CBR
Bitrate	600~6,000Kbps
GOP Structure	IPPP
GOP Size	1~99
Aspect Ratio	Automatic or Manual
Audio	MPEG-1 Layer II
Audio Bitrate	32~384Kbps
Audio Mode	Stereo (2.0, including downmix)
Audio Sampling Rate	48kHz
Audio Volume Leveling	-20dB~20dB
OSD Overlay	Text, Image, QR Code
Power Consumption	Max. 11W

\*Does NOT support PAL-N



OHE6-CVBS-R01A

CVBS - Модуль кодера	
Input	16 channels via 4 DB15 connectors, each DB15 for 4 channels 4 x RCA-DB15 adaptor cables come along with module
Video	H.264/AVC SD: MP/HP@L3.0/3.1/3.2
Resolution	SD: 576i50, 480i59.94
Bitrate Control	CBR
Bitrate	1,000~8,000Kbps
GOP Structure	IPPP
GOP Size	1~99
Aspect Ratio	Automatic or Manual
Audio	MPEG-1 Layer II
Audio Bitrate	32~384Kbps
Audio Mode	Stereo (2.0, including downmix)
Sampling Rate	48kHz
Audio Volume Leveling	-20dB~20dB
OSD Overlay	Text, Image, QR Code
Power Consumption	Max. 18W

\*Does NOT support PAL-N




OHP6-EAS-00

EAS - Модуль процессора	
Input	Digital EAS input (SCTE-18) via 1 x RJ45 port Analogue EAS input via 3PIN contact closure CVBS input via 1 x RCA connector Audio L/R input via 2 x RCA connector TS input via 1 x BNC connector
Video	H.264 SD: MP/HP@L3.0 MPEG-2 SD: MP @ML (By default)
Resolution	SD: 480i59.94
ASI	500Kbps to 100Mbps
Contact Closure	3PIN Connector with Dry Contact or 5~24V DC input for EAS trigger
RJ45	10/100M Ethernet for SCTE-18 digital EAS input
Bitrate Control	CBR
Bitrate	5,00~8,000Kbps
GOP Structure	IBBP, IPPP, IBP
GOP Size	6~63
Audio	MPEG-1 Layer II, AC3, AAC
Audio Mode	Stereo (2.0, including downmix)
Sampling Rate	48kHz
Power Consumption	Max. 5.5W



OHP6-ASI-00

ASI - Модуль интерфейсный	
Connector	5*ASI port, BNC female
Bit rate	500Kbps to 150Mbps
Reception mode	Byte mode(Continuous mode) Packet mode (Burst mode)
Transmission mode	Byte mode(Continuous mode)
Packet Length	188 Bytes or 204 Bytes
Working mode	3 ASI input ports, 2 ASI output ports by default, each port can be redefined as ASI input or ASI output port
Multiplexing	Support PSI/SI or PSIP table regeneration PID filtering External PID insertion

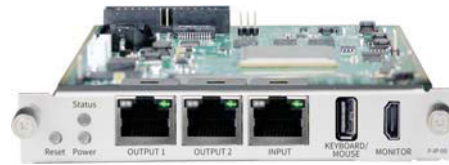

OHP6-IP-00

IP - Модуль интерфейсный	
Network	3* Internal port, 100/1000M 3* External RJ45 ports, 100/1000M Intel NIC chipset
HDMI	1*HDMI 2.0 port Connect to LCD Monitor
USB	1*USB 2.0 port Connect to external USB Hub for keyboard/mouse/USB DVD drive
Input Protocols	UDP/RTP/HLS/SRT RIST/Zixi/RTMP/RTMPS (future option)
Output Protocols	UDP/RTP/SRT RIST/Zixi/RTMP/RTMPS (future option)
Processing Capability For Typical Applications	HLS to UDP – up to 20 input streams, max 150mbps SRT to UDP – up to 20 input streams, max 150mbps UDP to SRT – up to 20 streams, max 150mbps, max 70 sessions. UDP to UDP – up to 50 streams, max bitrate 300mbps
Number of Gateways	Default: 10 gateways, UDP/RTP/HLS input, UDP/RTP output Notice: Additional license are required to support more gateways and network protocols

## Для заказа

### Шасси OmniHub 6

**OMNIHUB-6** - Шасси OmniHub 6, 1RU, 6 слотов с горячей заменой, БП AC, IP GBE порты

**OMNIHUB-6D** - Шасси OmniHub 6, 1RU, 6 слотов с горячей заменой, двойной БП AC, IP GBE порты

**OMNIHUB-6RFX** - Шасси OmniHub 6, 1RU, 6 слотов с горячей заменой, БП AC, IP GBE порты, модулятор QAM 4/8-CH (требуется лицензия RF)

**OH6RFX-OFDM-4-License** - Лицензия модуляции OFDM для OmniHub 6RFX, 4 последовательных TS

**OH6RFX-OFDM-8-License** - Лицензия модуляции OFDM для OmniHub 6RFX, 8 последовательных TS

**OH6RFX-QAMA-4-License** - Лицензия модуляции QAM Annex A/C для OmniHub 6RFX, 4 последовательных TS

**OH6RFX-QAMA-8-License** - Лицензия модуляции QAM Annex A/C для OmniHub 6RFX, 8 последовательных TS

**OH6RFX-QAMB-4-License** - Лицензия модуляции QAMB для OmniHub 6RFX, 4 последовательных TS

**OH6RFX-QAMB-8-License** - Лицензия модуляции QAMB для OmniHub 6RFX, 8 последовательных TS

**OH6RFX-8VSB-4-License** - Лицензия модуляции 8VSB для OmniHub 6RFX, 4 последовательных TS

**OH6RFX-8VSB-8-License** - Лицензия модуляции 8VSB для OmniHub 6RFX, 8 последовательных TS

### Модули для OmniHub 6

**ONR6-DVBC-00** - Модуль приемника DVB-C/DTMB, 4 CH, 1xRF вход, 4 тюнера, 2xCI слота

**ONR6-DVBC-ISDBT-01** - Модуль приемника DVB-C Annex B/ISDB-T 4 CH, вход 1xRF, 4 тюнера, 2xCI слота

**ONR6-8VSB-00** - Модуль приемника 8VSB, 4 CH, 4 RF входа, 1 тюнер на RF вход

**ONR6-DVBT2CI-00** - Модуль приемника DVB-T/T2, 4CH, разъем 1xF, 4 тюнера, 2xCI слота

**ONR6-DVBS2CI-00** - Модуль приемника DVB-S2, 4 CH, 2 RF входа, 2xCI слота, независимое питание LNB по каждому входу

**ONR6-DVBS2FTA-01** - Модуль приемника 4 CH, DVB-S2/S2X (QPSK, 8PSK, 16APSK, 32APSK, 64APSK), FTA, 4 входа (LNB1/2/3/4), независимое питание LNB для каждого входа

**ONR6-DVBS2FTA-01A** - Модуль приемника 4 CH, DVB-S2/S2X (QPSK, 8PSK, 16APSK, 32APSK, 64APSK), FTA, 4 входа (LNB1/2/3/4), независимое питание LNB для каждого входа, 2 слота

**ONR6-CAM-00** - Модуль CI с 2 CAM слотами

**ONE6-HDMI-06** - Модуль видеокодера, входы HDMI, 4 CH, поддержка H.265/H.264 HD/SD, MPEG1L2, AAC (опция), AC3(опция) (профессиональный чип)

**ONE6-CVBS-00** - Модуль видео кодера, входы CVBS, 6 CH, поддержка H.264/MPEG-2 SD, MPEG1L2, AAC(опция), AC3(опция) (профессиональный чип)

**ONE6-CVBS-03** - Модуль видео кодера, входы CVBS, 2 CH, поддержка H.264/MPEG-2 SD, CC, MPEG1L2, AC3, AAC

**ONE6-CVBS-R01** - Модуль видео кодера, входы CVBS, 8 CH, поддержка H.264 SD, MPEG1L2, AAC(опция), AC3(опция) (коммерческий чип)

**ONE6-CVBS-R01A** - Модуль видео кодера, входы CVBS, 16 CH, поддержка H.264 SD, MPEG1L2, AAC(опция), AC3(опция) (коммерческий чип)

**ONE6-HDMI-02** - Модуль видео кодера, входы HDMI, 2 CH, поддержка H.264/MPEG-2 HD/SD, MPEG1L2, AAC, AC3, поддержка входа CC

**ONE6-HDMI-02C** - Модуль видео кодера, входы HDMI/Component, 2 CH, поддержка H.264/MPEG-2 HD/SD, MPEG1L2, AAC, AC3, аудио опции включены, поддержка CC и аналогового аудио входа

**ONE6-SDI-01** - Модуль видео кодера, входы SDI, 2 CH, поддержка H.264/MPEG-2 HD/SD, MPEG1L2, AAC, AC3, поддержка CC

**ONR6-ASI-00** - Модуль интерфейсный ASI, 5 двунаправленных входов

**ONR6-IP-00** - Модуль интерфейсный IP

**ONR6-IP-00010** - Лицензия на 10 дополнительных шлюзов, для модуля интерфейсного IP

**ONR6-IP-00020** - Лицензия поддержки SRT, для модуля интерфейсного IP, одна на модуль

**ONR6-IP-00050** - Лицензия UDP шлюза, 50 шлюзов, отключает все другие протоколы, не может импользоваться с другими лицензиями, для модуля интерфейсного IP, одна на модуль

**ONR6-EIT-00** - Модуль мультиплексора EIT, 32 x TS входов и 16 x TS выходов

**ONR6-EAS-00** - Модуль обработки EAS сигналов

**ONS6-CAM-00** - Модуль Xсгурт (CAMCAS)

**ONM6-MOD-02** - Модуль модулятора QAM, Annex A/C, 32x несмежные частоты, поддержка CAS

**ONM6-QAMA-R00** - Модуль модулятора QAM, Annex A/C, 1xRF выход, 16x несмежных частот

**ONM6-QAMB-R00** - Модуль модулятора QAM, Annex B, 1xRF выход, 16x несмежных частот

**ONM6-QAMA-R01** - Модуль модулятора QAM, Annex A/C, 4 CH

**ONM6-QAMA-R01A** - Модуль модулятора QAM, Annex A/C, 8 CH

**ONM6-QAMA-02** - Модуль модулятора QAM, Annex A/C, 16x несмежных частот, поддержка CAS

**ONM6-QAMA-02A** - Модуль модулятора QAM, Annex A/C, 32x несмежные частоты, поддержка CAS

**ONM6-QAMA-R01** - Модуль модулятора QAM, Annex A/C, 4 CH

**ONM6-QAMA-R01A** - Модуль модулятора QAM, Annex A/C, 8 CH

**ONM6-QAMB-R01** - Модуль модулятора QAM, Annex B, 4 CH

**OHM6-QAMB-R01A** - Модуль модулятора QAM, Annex B, 8 CH

**OHM6-OFDM-R01** - Модуль модулятора OFDM, 4 CH

**OHM6-OFDM-R01A** - Модуль модулятора OFDM, 8 CH

**OHM6-ISDBT-R01** - Модуль модулятора ISDBT, 4 CH

**OHM6-ISDBT-R01A** - Модуль модулятора ISDBT, 8 CH

**OHM6-8VSB-R01** - Модуль модулятора 8VSB, 4 CH

**OHM6-8VSB-R01A** - Модуль модулятора 8VSB, 8 CH

Шасси
1RU with 6 slots for hot-swappable modules
Dual redundant power supplies
Service level multiplexing
4 x Gigabit RJ45 (embedded) : <ul style="list-style-type: none"> <li>• MPEG TS over UDP/RTP multicast/unicast SPTS/MPTS</li> <li>• Max. 120 inputs and 120 outputs</li> </ul>

Размеры и условия работы	
Input Voltage	100~240 VAC/50-60Hz
Power Consumption	Max. 120W
Chassis Dimension (W x H x D)	480mm x 44mm x 345mm (18.90" x 1.73" x 13.58"), 4RU
Operating Temperature	0°C~50°C (32°F ~ 122°F)
Storage Temperature	-10°C~70°C (14°F ~ 174.2°F)
Operating Humidity	<95%
MTBF	≥100,000 hours

## О компании Sencore

Sencore является лидером в разработке надежных, экономичных решений по передаче сигналов и мониторинга контента для рынков вещания, кабельного, спутникового и IPTV. Обеспечивая обслуживание и поддержку клиентов мирового уровня, портфель Sencore включает в себя оборудование для передачи и распространения видео, системный мониторинг и анализ. Решения Sencore, разработанные для удовлетворения потребностей постоянно меняющейся отрасли вещания, обеспечивают эффективную доставку высококачественного видео с использованием самых современных технологий, включая доставку по IP и мультимедийные технологии OTT.

