

## OmniHub 16 - универсальная экономичная головная станция

Sencore OmniHub 16 - многофункциональная масштабируемая IP-TV / CATV головная станция для телевизионных операторов различного уровня.



Sencore OmniHub 16 - это экономичная многофункциональная головная станция нового поколения, ориентированная на использование кабельными операторами, в корпоративных сетях, гостиничном бизнесе и для мониторинга вещания.

### Производительность и компактность

Шасси 4 RU с резервированным блоком питания позволяет устанавливать до 16 модулей приема и обработки видео с поддержкой горячей замены. На базе платформы Sencore OmniHub 16 возможно реализовать головную станцию IPTV & QAM с самым широким набором возможностей - до 64 частот по приему DVB-C/S/S2/S2X, до 64 каналов HD кодирования по входам HDMI, до 96 каналов SD-кодирования по аналоговым видеовходам CVBS, до 256 каналов модуляции QAM.

### Надежность и экономичность


Встроенный мониторинг сервисов Sencore OmniHub 16 осуществляет непрерывный контроль качества услуг. В сочетании с двойным резервированным блоком питания, услуга вещания будет предоставляться круглосуточно и на высоком уровне. Компактный форм-фактор и малое энергопотребление экономит место и снижает эксплуатационные расходы.

### Возможности

- Компактная модульная конструкция плотной компоновки: 4 RU шасси, до 16 модулей
- Поддерживается до 120 входных и 120 выходных IP потоков SPTS/MPTS
- Мультиплексирование на уровне сервисов
- Анализ, формирование и регенерация PSI / SI таблиц
- Низкий уровень шума
- Прием до 64 ВЧ несущих (QAM, DVB-S/S2/S2X, и т.д.)
- Кодирование до 64 HD каналов (через HDMI входы)
- Кодирование до 96 SD каналов (аналоговые входы)
- До 256 выходных частот QAM
- Горячая замена модулей
- Мониторинг на уровне сервисов
- Резервированный (двойной) блок питания
- Гибкость и масштабируемость
- Дружественный и интуитивно понятный интерфейс управления
- Малое энергопотребление и высокая надежность (MTBF ≥100 000 часов)




## Технические характеристики

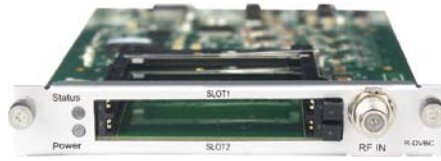

OHR6-DVBC-00

DVBC - Модуль приемника	
Input	4 channels via 1 RF female connector
CI	2 x PCMCIA CI slots
CAM	Descrambled channel quantity depends on CAM capability, 2 CAMs could be different
QAM Mode	Annex A/C
Frequency Range	47~862MHz
Bandwidth	6/7/8MHz
Constellation	16QAM/32QAM/64QAM/128QAM/256QAM
Symbol Rate	3.6~6.952Ms/s
Signal Level	40~80dBuV
CA System	Supports mainstream CAS
Power Consumption	Max. 9.5W

DTMB - Модуль приемника	
Input	4 channels via 1 RF female connector
CI	2 x PCMCIA CI slots
CAM	Descrambled channel quantity depends on CAM capability, 2 CAMs could be different
Modulation Mode	TDS-OFDM
Frequency Range	47~862MHz
Constellation	4QAM-NR/4QAM/16QAM/32QAM/64QAM
Signal Level	-65~-25dm
CA System	Supports mainstream CAS
Power Consumption	Max. 9.5W

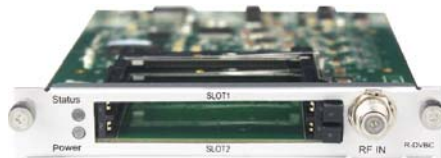

OHR6-DVBC-ISDBT-01

DVBC Annex B - Модуль приемника	
Input	4 channels via 1 RF female connector
CI	2 x PCMCIA CI slots
CAM	Descrambled channel quantity depends on CAM capability, 2 CAMs could be different
QAM Mode	Annex B
Frequency Range	47~862MHz
Bandwidth	6MHz
Constellation	64QAM, 256QAM
Symbol Rate	5.057Ms/s (64QAM) 5.360Ms/s (256QAM)
Signal Level	40~80dBuV
CA System	Supports mainstream CAS
Power Consumption	Max. 9.5W

ISDB-T - Модуль приемника	
Input	4 channels via 1 RF female connector
CI	2 x PCMCIA CI slots
CAM	Descrambled channel quantity depends on CAM capability, 2 CAMs could be different
Frequency Range	177.143-863.143 MHz
Bandwidth	6/7/8MHz
Constellation	DQPSK, QPSK, 16QAM, 64QAM
FEC	1/2, 2/3, 3/4, 5/6, 7/8, Automatic
Signal Level	-80~-20dBm
CA System	Supports mainstream CAS
Power Consumption	Max. 9.5W



OHR6-DVBS2FTA-01



OHR6-DVBS2FTA-01A


DVB-S/S2/S2X - Модуль приемника	
Input	C/Ku Band, 4 channels via 4 RF female connectors
LNB Power	Independent power supplies for each LNB
LNB Voltage	13V/18V
LNB Current	Max. 400mA
Constellation	DVB-S: QPSK, 8PSK DVB-S2: QPSK, 8PSK, 16APSK, 32APSK DVB-S2X: QPSK, 8PSK, 16APSK, 32APSK, 64APSK
Frequency Range	950~2150MHz
Signal Level	-70~-20dBm
Roll-off Factor	0.15, 0.20, 0.25, 0.35
Symbol Rate	DVB-S: 1~45Msps DVB-S2: 1~45Msps DVB-S2X: 1~34 Msps
FEC	DVB-S: 1/2, 2/3, 3/4, 5/6, 7/8 DVB-S2: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 DVB-S2X: 11/15, 7/9, 4/5, 5/6 (Normal FEC FECFRAME)
Power Consumption	Max. 30W

DVB-S/S2/S2X - Модуль приемника	
Input	C/Ku Band, 8 channels via 8 RF female connectors
LNB Power	Independent power supplies for each LNB
LNB Voltage	13V/18V
LNB Current	Max. 400mA
Constellation	DVB-S: QPSK, 8PSK DVB-S2: QPSK, 8PSK, 16APSK, 32APSK DVB-S2X: QPSK, 8PSK, 16APSK, 32APSK, 64APSK
Frequency Range	950~2150MHz
Signal Level	-70~-20dBm
Roll-off Factor	0.15, 0.20, 0.25, 0.35
Symbol Rate	DVB-S: 1~45Msps DVB-S2: 1~45Msps DVB-S2X: 1~34 Msps
FEC	DVB-S: 1/2, 2/3, 3/4, 5/6, 7/8 DVB-S2: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 DVB-S2X: 11/15, 7/9, 4/5, 5/6 (Normal FEC FECFRAME)
Power Consumption	Max. 30W

Notes: If 2 or 3 modules are needed in the same chassis, please contact your sales.



OHR6-DVBS2CI-01

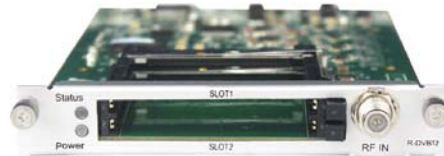


OHR6-DVBT2CI-00

DVB-S/S2/S2X - Модуль приемника	
Input	C/Ku Band, 4 channels via 2 RF female connectors CH1 & CH2 via LNB-1 CH3 & CH4 via LNB-2
LNB Power	Independent power supplies for each LNB
LNB Voltage	13V/18V
LNB Current	Max. 400mA
CI	2 x PCMCIA CI slots
CAM	Descrambled channel quantity depends on CAM capability, 2 CAMs could be different
Constellation	DVB-S: QPSK, 8PSK DVB-S2: QPSK, 8PSK, 16APSK, 32APSK DVB-S2X: QPSK, 8PSK, 16APSK, 32APSK, 64APSK
Frequency Range	950~2150MHz
Signal Level	-70~-20dBm
Roll-off Factor	0.15, 0.20, 0.25, 0.35
Symbol Rate	DVB-S: 1~45Msps DVB-S2: 1~45Msps DVB-S2X: 1~34 Msps
FEC	DVB-S: 1/2, 2/3, 3/4, 5/6, 7/8 DVB-S2: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 DVB-S2X: 11/15, 7/9, 4/5, 5/6 (Normal FEC FECFRAME)
CA System	Supports mainstream CAS
Power Consumption	Max. 22W

DVB-T/T2 - Модуль приемника	
Input	4 channels via 1 RF female connector
CI	2 x PCMCIA CI slots
CAM	Descrambled channel quantity depends on CAM capability, 2 CAMs could be different
Frequency Range	47~862MHz
Bandwidth	6/7/8MHz
Constellation	DVB-T: QPSK/16QAM/64QAM DVB-T2: QPSK/16QAM/64QAM/256QAM
Guard Interval	DVB-T: 1/4, 1/8, 1/16, 1/32 DVB-T2: 1/4, 1/8, 1/16, 1/32, 1/128 19/256, 19/128
FFT Size	DVB-T: 2K, 8K DVB-T2: 1K, 2K, 4K, 8K, 16K, 32K
Signal Level	-80~-20dBm
CA System	Supports mainstream CAS
Power Consumption	Max. 8W



OHR6-8VSB-00

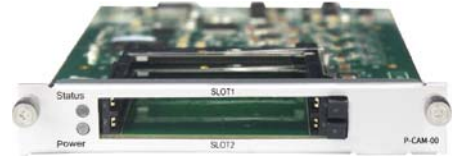

OHP6-CAM-00

8VSB - Модуль приемника	
Input	4 channels via 4 RF female connector
Frequency Range	50~860MHz
Bandwidth	6MHz
Modulation	8VSB
Signal Level	-80~-20dBm
Power Consumption	Max. 9.5W

CI - Модуль CI	
Standard	EN 50221
Interface	2 x PCMCIA CI slots
CAM Scrambling	Support Xcrypt CAMCAS
CAM Descrambling	Supports mainstream CAS Descrambled channel quantity depends on CAM capability, 2 CAMs could be different
Power Consumption	Max. 8W



OHP6-EIT-00



OHP6-EAS-00

EIT - Модуль мультиплексора EIT	
Input	DVB-S/S2/S2X/T/T2/C/ISDB-T/DTMB/IP
Output	QAM/OFDM/ISDB-T/DTMB/IP
Standard	DVB standard
Processing Capability	32 TS stream input, 16 TS stream output Up to 100 services depending on the EIT complexity of signal source
Content Processing	Automatic update for Original Network ID, TS ID and Service ID
EIT Table Generation	EIT table with PID 18 will be generated after the processing
TDT/TOT Table	TDT/TOT table with PID 20 will be passed through to the output
EIT Enable/Disable Control	Module Level, TS Level, Service Level
Supported EIT Module in Each Chassis	1
Status Display	Service name and service list Signal source and output module EIT multiplexing success/failure display at service level
Configuration	Configuration can be exported and imported to the module
Software Upgrade	Web-based software upgrade
Log	Support Enable/Disable control, Live logging and log file export
License	License control is available for authorization time control
Web-based Management	Yes
SNMP	SNMP V1/V2 (coming soon)

EAS - Модуль обработки EAS сигналов	
Input	Digital EAS input (SCTE-18) via 1 x RJ45 port Analogue EAS input via 3PIN contact closure CVBS input via 1 x RCA connector Audio L/R input via 2 x RCA connector TS input via 1 x BNC connector
Video	H.264 SD: MP/HP@L3.0 MPEG-2 SD: MP @ML (By default)
Resolution	SD: 480i/59.94
ASI	500Kbps to 100Mbps
Contact Closure	3PIN Connector with Dry Contact or 5~24V DC input for EAS trigger
RJ45	10/100M Ethernet for SCTE-18 digital EAS input
Bitrate Control	CBR
Bitrate	5,00~8,000Kbps
GOP Structure	IBBP, IPPP, IBP
GOP Size	6~63
Audio	MPEG-1 Layer II, AC3, AAC
Audio Mode	Stereo (2.0, including downmix)
Sampling Rate	48kHz
Power Consumption	Max. 5.5W



OHM6-OFDM-03



OHM6-QAMA/B-R00

OFDM - Модуль модулятора	
Output	8 agile frequencies via 1 RF female connector 75Ω
Standard	ETSI EN 300744
Frequency Range	47~862MHz
Bandwidth	6/7/8MHz
Constellation	QPSK/16QAM/64QAM
Guard Intervals	1/4, 1/8, 1/16, 1/32 2K, 8K
FFT Size	
Code Rates	1/2, 2/3, 3/4, 5/6, 7/8
Output Level	Max. 105dBμV
MER	≥42dB
Power Consumption	4CH: Max. 23W; 8CH: Max. 27W

QAM - Модуль модулятора	
Output	16 agile frequencies via 1 RF female connector 75Ω
1 x RJ45	Reserved for scrambling
Standard	ITU-T J.83 Annex A/B/C
Frequency Range	47~862MHz
Bandwidth	6/7/8MHz
Constellation	16QAM/32QAM/64QAM/128QAM/256QAM
Symbol Rate	3.6~6.9Ms/s
Output Level	Max. 106dBμV
MER	>40dB
Power Consumption	QAMA: Max. 22W; QAMB: Max. 28W



OHM6-QAMA-03



OHM6-QAMB4-R00


QAMA - Модуль модулятора	
Output	8 agile frequencies via 1 RF female connector 75Ω
Standard	ITU-T J.83 Annex A/C
Frequency Range	47~1002MHz
Bandwidth	6/7/8MHz
Constellation	16QAM/32QAM/64QAM/128QAM/256QAM
Symbol Rate	3.6~6.9 Ms/s
Output Level	Max. 105dBμV
MER	≥42dB
Power Consumption	4CH: Max. 23W; 8CH: Max. 27W

QAM - Модуль модулятора	
Output	4 agile frequencies via 1 RF female connector 75Ω
1 x RJ45	Reserved for scrambling
Standard	ITU-T J.83 Annex B
Frequency Range	47~862MHz
Bandwidth	6/7/8MHz
Constellation	64QAM/256QAM
Symbol Rate	3.6~6.9Ms/s
Output Level	Max. 106dBμV
MER	>40dB
Power Consumption	Max. 28W





OHM6-QAMA/B-02

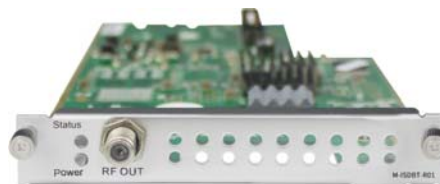

OHM6-ISDB-T-03

IPQAM - Модуль модулятора	
IP input	2x100/1000Mbps ports, 1xSFP +/10Gbps port (Future)
IP Encapsulation	MPEG TS over UDP/RTP
MPEG TS	MPTS and SPTS
I/O Processing	Up to 1024 channels either via each 2xGbE input
Addressing	Unicast and multicast
IGMP Version	IGMP v2, IGMP v3
QAM Output	
Output	1xRF port, max 32 agile channels QAM modulation
Standard	ITU-T J.83 Annex A/B/C
QAM Constellation	64/256 QAM, configurable for each frequency
Symbol Rate	3.6~7Mbauds
Output Level	85~117dBuV according to modulation frequency quantity
Output Range	57~858MHz
Bandwidth	6/7/8MHz
MER	≥43dB(equalized)
PCR Correction	Support
Multiplexing	
Table Supported	SI/PSI
PID Processing	Pass-through, remapping, filtering
EIT Processing	Pass-through
External Data	EPG, PID and SI insertion
Scrambling (QAM A/C)	
Interface	1x100/1000 Mbps port
Scrambling Algorithms	CSA
SCS	Internal
CAS Connections	Up to 4 different CA systems
Supported CAS	Support major CA systems
Max. TS rate	1.6Gbps
EMM Bitrate	Up to 3Mbps
Power Consumption	Max. 45W

ISDB-T - Модуль модулятора	
Output	8 agile frequencies via 1 RF female connector, 75Ω
Standard	ARIB STD-B31
Frequency Range	47-862MHz
Bandwidth	6MHz
Constellation	QPSK, 16QAM, 64QAM
Transmission Mode	2K
RS Code	RS(204.188)
FEC	1/2, 2/3, 3/4, 5/6, 7/8
Guard Interval	1/4, 1/8, 1/16, 1/32
Hierarchy Mode	Layer A
Segment Mode	Full Seg
Output Level	Max. 105dBμV
MER	≥42dB
Power Consumption	4CH: Max. 23W; 8CH: Max. 27W



OHE6-HDMI-02C



OHE6-HDMI-R01

HDMI - Модуль кодера	
Input	2 channels via 2 HDMI or 2 component Female connectors (HDMI1.4) CC/Component input via DB15 port
Video	H.264/AVC HD: MP/HP@L4.0, SD: MP/HP@L3.0 MPEG-2 SD: MP @ML HD: MP@HL
Resolution	SD: 576i50, 480i59.94 HD: 1080p-25/30/50/59.94/60 1080i-50/60 720p-50/60 *The maximum output resolution is 1080i60.
Bitrate Control	CBR
Bitrate	1,000~18,000Kbps
GOP Structure	IBBP, IPPP, IBP
GOP Size	6~63
Audio	MPEG-1 Layer II, AC3, AAC
Audio Mode	Stereo (2.0, including downmix)
Sampling Rate	48kHz
Power Consumption	Max. 16W

HDMI - Модуль кодера	
Input	4 channels via 4 HDMI female connectors (HDMI 1.4)
Video	H.264/AVC HD: MP/HP@L4.0 SD: MP/HP@L3.0 MPEG-2 SD: MP@ML
Resolution	SD: 576i50, 480i59.94 HD: 1080p-25/30/50/59.94/60 1080i-50/59.94/60 720p-50/60 *Output resolution supports up to 1920 x 1080p30
Bitrate Control	CBR
Video Bitrate	1,000~14,000Kbps
GOP Structure	IBBP, IPPP, IBP
GOP Size	6~63
Aspect Ratio	Automatic or Manual
Audio	MPEG-1 Layer II, AC3 (optional), AAC (optional)
Audio Bitrate	32~384Kbps
Audio Mode	Stereo (2.0, including downmix)
Audio Sampling Rate	48kHz
Audio Volume Leveling	-20dB~20dB
Power Consumption	Max. 12W



OHE6-HDMI-02



OHE6-HDMI-06

HDMI - Модуль кодера	
Input	2 channels via 2 HDMI Female connectors (HDMI1.4) CC via RCA connector
Video	H.264/AVC HD: MP/HP@L4.0, SD: MP/HP@L3.0 MPEG-2 SD: MP @ML HD: MP@HL
Resolution	SD: 576i50, 480i59.94 HD: 1080p-25/30/50/59.94/60 1080i-50/60 720p-50/60 *The maximum output resolution is 1080i60.
Bitrate Control	CBR
Bitrate	1,000~18,000Kbps
GOP Structure	IBBP, IPPP, IBP
GOP Size	6~63
Audio	MPEG-1 Layer II, AC3, AAC
Audio Mode	Stereo (2.0, including downmix)
Sampling Rate	48kHz
Power Consumption	Max. 16W

HEVC - Модуль кодера	
Input	4 channels via 4 HDMI female connector (HDMI 1.4)
Video	H.264/AVC HD: MP/HP@L4.0/4.1/4.2 H.265/HEVC HD: MP(High Tier)@L4.0/4.1
Resolution	Input: 1080i-50/59.94/60, 1080P-50/59.94/60, 720P-50/59.94/60 Output: 1080P-50/59.94/60, 720P-50/59.94/60
Bitrate Control	CBR
Video Bitrate	600Kbps-12Mbps
GOP Structure	IPPP, IBBP
Aspect Ratio	Automatic or manual (4:3, 16:9)
Audio	MPEG-1 Layer II, AC3 (optional), AAC (optional)
Audio Bitrate	32~384 Kbps
Audio Mode	Stereo
Audio Sampling Rate	48KHz
Audio Volume Leveling	-20dB~20dB
OSD Overlay	2 x Logo/QR code overlay (40 x 40 to 256 x 256) Or 1 x static OSD overlay
Power Consumption	Max.65W

Notes: CE2-HDMI-06 will forcefully output 4 HD programs with same video resolution which follows the largest video resolution among the input source and SD encoding is not supported yet.



OHE6-CVBS-00



OHE6-CVBS-R01

CVBS - Модуль кодера	
Input	6 channels via 2 DB15 connector each DB15 for 3 channels 2 x RCA-DB15 adaptor cables come along with module
Video	H.264/AVC SD: MP/HP@L3.0 MPEG-2 SD: MP@ML
Resolution	SD: 576i50, 480i59.94
Bitrate Control	CBR
Bitrate	1,000~6,000Kbps
GOP Structure	IBBP, IPPP, IBP
GOP Size	6~63
Aspect Ratio	Automatic or Manual
Audio	MPEG-1 Layer II
Audio Bitrate	32~384Kbps
Audio Mode	Stereo (2.0, including downmix)
Audio Sampling Rate	48kHz
Audio Volume Leveling	-20dB~20dB
Power Consumption	Max. 17W

CVBS - Модуль кодера	
Input	16 channels via 4 DB15 connectors, each DB15 for 4 channels 4 x RCA-DB15 adaptor cables come along with module
Video	H.264/AVC SD: MP/HP@L3.0/3.1/3.2
Resolution	SD: 576i50, 480i59.94
Bitrate Control	CBR
Bitrate	1,000~8,000Kbps
GOP Structure	IPPP
GOP Size	1~99
Aspect Ratio	Automatic or Manual
Audio	MPEG-1 Layer II
Audio Bitrate	32~384Kbps
Audio Mode	Stereo (2.0, including downmix)
Sampling Rate	48kHz
AudioAudio Volume Leveling	-20dB~20dB
OSD Overlay	Text, Image, QR Code
Power Consumption	Max. 18W

\*Does NOT support PAL-N



OHE6-SDI-01



OHP6-ASI-00

SDI - Модуль кодера	
Input	2 channels via 2 SDI SDI via BNC connector
Video	H.264/AVC HD: MP/HP@L4.0, SD: MP/HP@L3.0 MPEG-2 SD: MP @ML HD: MP@HL
Resolution	SD: 576i50, 480i59.94 HD: 1080p-25/30/50/59.94/60, 1080i-50/60 720p-50/60 *The maximum output resolution is 1080i60.
Bitrate Control	CBR
Bitrate	1,000~18,000Kbps
GOP Structure	IBBP, IPPP, IBP
GOP Size	6~63
Audio	MPEG-1 Layer II, AC3, AAC
Audio Mode	Stereo (2.0, including downmix)
Sampling Rate	48kHz
Power Consumption	Max. 16W

ASI - Модуль интерфейсный	
Connector	5 x bidirectional ASI ports, BNC female
Bit rate	500Kbps to 150Mbps
Reception/ Transmission mode	Byte mode(Continuous mode) Packet mode (Burst mode)
Packet Length	188 Bytes or 204 Bytes
Working mode	3 ASI input ports, 2 ASI output ports by default, each port can be redefined as ASI input or ASI output port
Multiplexing	Support PSI/SI or PSIP table regeneration PID filtering External PID insertion
Power Consumption	Max. 16 W





OHP6-IP-00



OHP6-IP-02

IP - Модуль обработки IP	
Network	3 x Internal port, 100/1000M 3 x External RJ45 ports, 100/1000M Intel NIC chipset
HDMI	1 x HDMI 2.0 port Connect to LCD Monitor
USB	1 x USB 2.0 port Connect to external USB Hub for keyboard/mouse/USB DVD drive
Input Protocols	UDP/RTP/HLS/SRT RIST/Zixi/RTMP/RTMPS (future option)
Output Protocols	UDP/RTP/SRT RIST/Zixi/RTMP/RTMPS (future option)
Processing Capability For Typical Applications	HLS to UDP – up to 20 input streams, max 150mbps SRT to UDP – up to 20 input streams, max 150mbps UDP to SRT – up to 20 streams, max 150mbps, max 70 sessions.
Number of Gateways	Default: 10 gateways, UDP/RTP/HLS input, UDP/RTP output Notice: Additional license are required to support more gateways and network protocols

IP - Модуль мультиплексора IP	
Ethernet	2 x RJ45, 100/1000Base-T
Input	UDP/RTP via Unicast/Multicast
Output	UDP/RTP via Unicast/Multicast
Channels	DATA 1: 128 input & output DATA 2: 120 input & output
Effective Bitrate	Maximum 700 Mbps (total 2 ports)
Power Consumption	Max. 16 W

\*The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.

## Для заказа

### Шасси OmniHub 16

**OMNINHUB-16-02** - Шасси OmniHub 16, 4RU, 16 слотов, двойной БП АС

**OH16-OPT-00** - Комплект телескопического крепления OMNI HUB-16

**OH-AC3-AAC-4CH** - Лицензии AC3 (2-channel stereo audio) и AAC, для модуля кодера 4CH

**OH-AC3-AAC-8CH** - Лицензии AC3 (2-channel stereo audio) и AAC, для модуля кодера 8CH

### Модули и дополнительные опции для OmniHub 16

Модули для моделей OMNINHUB-6 & OMNINHUB-16-02 одинаковые. Полный артикул формируется в зависимости от типа шасси - OHR6-xxxxxx для шасси серии OMNINHUB-6 и OHR16-xxxxxx для шасси серии OMNINHUB-16:

**OHR6-DVBC-00** - Модуль приемника DVB-C/DTMB, 4 CH, 1xRF вход, 4 тюнера, 2xCI слота

**OHR6-DVBC-ISDBT-01** - Модуль приемника DVB-C Annex B/ISDB-T 4 CH, вход 1xRF, 4 тюнера, 2xCI слота

**OHR6-8VSB-00** - Модуль приемника 8VSB, 4 CH, 4 RF входа, 1 тюнер на RF вход

**OHR6-DVBT2CI-00** - Модуль приемника DVB-T/T2, 4CH, разъем 1xF, 4 тюнера, 2xCI слота

**OHR6-DVBS2CI-01** - Модуль приемника DVB-S2/S2X, 4 CH, 2 RF входа 2x канальные (LNB1&LNB2), 2xCI слота, независимое питание LNB по каждому входу

**OHR6-DVBS2FTA-01** - Модуль приемника 4 CH, DVB-S2/S2X (QPSK, 8PSK, 16APSK, 32APSK, 64APSK), FTA, 4 входа (LNB1/2/3/4), независимое питание LNB для каждого входа

**OHR6-DVBS2FTA-01A** - Модуль приемника 8 CH, DVB-S2/S2X (QPSK, 8PSK, 16APSK, 32APSK, 64APSK), FTA, 8 входов (LNB1/2/3/4/5/6/7/8), независимое питание LNB для каждого входа, 2 слота

**OHR6-CAM-00** - Модуль CI с 2 CAM слотами

**OHE6-HDMI-06** - Модуль видеокодера, входы HDMI, 4 CH, поддержка H.265/H.264 HD/SD, MPEG1L2, AAC (опция), AC3(опция) (профессиональный чип)

**OHE-CVBS-00** - Модуль видео кодера, входы CVBS, 6 CH, поддержка H.264/MPEG-2 SD, MPEG1L2 (профессиональный чип)

**OHE6-CVBS-03** - Модуль видео кодера, входы CVBS, 2 CH, поддержка H.264/MPEG-2 SD, CC, MPEG1L2, AC3, AAC

**OHE6-CVBS-R01** - Модуль видео кодера, входы CVBS, 8 CH, поддержка H.264 SD, MPEG1L2, (коммерческий чип)

**OHE6-CVBS-R01A** - Модуль видео кодера, входы CVBS, 16 CH, поддержка H.264 SD, MPEG1L2, (коммерческий чип)

**OHE6-HDMI-R01** - Модуль видео кодера, входы HDMI, 2 CH, поддержка H.264 HD/SD, MPEG1L2, AAC (опция), AC3 (опция), поддержка OSD subtitle, вставка логотипа и QR Code

**OHE6-HDMI-02** - Модуль видео кодера, входы HDMI, 2 CH, поддержка H.264/MPEG-2 HD/SD, MPEG1L2, AAC, AC3, поддержка входа CC

**OHE6-HDMI-02C** - Модуль видео кодера, входы HDMI/Component, 2 CH, поддержка H.264/MPEG-2 HD/SD, MPEG1L2, AAC, AC3, аудио опции включены, поддержка CC и аналогового аудио входа

**OHE6-SDI-01** - Модуль видео кодера, входы SDI, 2 CH, поддержка H.264/MPEG-2 HD/SD, MPEG1L2, AAC, AC3, поддержка CC

**OHR6-ASI-00** - Модуль интерфейсный ASI, 5 двунаправленных портов

**OHR6-IP-00** - Модуль обработки IP, активно 10 шлюзов

**OHR6-IP-00010** - Лицензия на 10 дополнительных шлюзов, для модуля интерфейсного IP

**OHR6-IP-00020** - Лицензия поддержки SRT, для модуля интерфейсного IP, одна на модуль

**OHR6-IP-00030** - Лицензия поддержки RIST, для модуля интерфейсного IP, одна на модуль

**OHR6-IP-00040** - Лицензия поддержки ZIXI, для модуля интерфейсного IP, одна на модуль

**OHR6-IP-00050** - Лицензия UDP шлюза, 50 шлюзов, отключает все другие протоколы, не может использоваться с другими лицензиями, для модуля интерфейсного IP, одна на модуль

**OHR6-IP-02** - Модуль мультиплексора IP, интерфейсы 2\*GbE RJ45, обработка до 120 IP потоков вход/выход на порт, поддержка UDP/RTP Multicast/Unicast

**OHR6-IP-02-SFP** - Модуль мультиплексора IP, интерфейсы 1\*GbE RJ45 / 1\* SFP, обработка до 120 IP потоков вход/выход на порт, поддержка UDP/RTP Multicast/Unicast

**OHR6-EIT-00** - Модуль мультиплексора EIT, 32 x TS входов и 16 x TS выходов

**OHR6-EAS-00** - Модуль обработки EAS сигналов

**OHS6-CAM-00** - Модуль Xсгурт (CAMCAS)

**OHM6-QAMA-02A** - Модуль модулятора QAM, Annex A/C, 32х несмежные частоты, поддержка CAS

**OHM6-QAMB-02A** - Модуль модулятора QAM, Annex B, 32х несмежные частоты

**OHM6-QAMA-03** - Модуль модулятора QAM, Annex A/C, 8 CH, гибкие настройки

**OHM6-OFDM-03** - Модуль модулятора OFDM, 8 CH, гибкие настройки

**OHM6-ISDBT-03** - Модуль модулятора ISDBT, 8 CH, гибкие настройки

**OHM6-8VSB-03** - Модуль модулятора 8VSB, 1 CH

Шасси
4RU with 16 slots for hot-swappable modules
Dual redundant power supplies
Service level multiplexing
4 x Gigabit RJ45 (embedded) : <ul style="list-style-type: none"> <li>• MPEG TS over UDP/RTP multicast/unicast</li> <li>• SPTS/MPTS</li> <li>• Max. 120 inputs and 120 outputs</li> </ul>

Размеры и условия работы	
Input Voltage	100~240 VAC/50-60Hz
Power Consumption	Max. 350W
Chassis Dimension (W x H x D)	480mm x 177mm x 345mm (18.90" x 6.97" x 13.58"), 4RU
Operating Temperature	0°C~50°C (32°F ~ 122°F)
Storage Temperature	-10°C~70°C (14°F ~ 174.2°F)
Operating Humidity	<95%
MTBF	≥100,000 hours

### **О компании Sencore**

Sencore является лидером в разработке надежных, экономичных решений по передаче сигналов и мониторинга контента для рынков вещания, кабельного, спутникового и IPTV. Обеспечивая обслуживание и поддержку клиентов мирового уровня, портфель Sencore включает в себя оборудование для передачи и распространения видео, системный мониторинг и анализ. Решения Sencore, разработанные для удовлетворения потребностей постоянно меняющейся отрасли вещания, обеспечивают эффективную доставку высококачественного видео с использованием самых современных технологий, включая доставку по IP и мультиформатные технологии OTT.

